


D-Light 2 Milestone®

Ideal solution for roads and landscape areas
 Modular structure with Heper's patented Milestone® LED modul
 Power: 70W
 Luminous flux: 7000lm - 8000lm
 Color temperature: 3000K, 4000K
 Removable & Replaceable LED Modules for easy maintenance
 CIE Photometrical Classification: Full Cut-off
 IES Photometrical Classification: Full Cut-off
 147 lm/w @ 700mA, Tj=85°C – 4000K
 LED Current 350mA | 525mA | 700mA
 Optical unit lifetime:
 L90 >118.000 hours as per TM-21 up to Ta=50°C
 Optimized road light distribution
 Multifaceted micro-reflection system with anti-glare feature
 CRI 4000K > 70, 3000K > 80
 Optimized PCB-Design; aluminum PCB or FR-4 PCB with touchdown technology
 Corrosion resistant aluminum housing
 Electrostatic powder coating
 Color: standard HM1 to HM5, optional RAL codes
 IP66, IK08
 Safety class: standard CLASS I, optional CLASS II
 Control system (optional): 1-10V, DALI, AstroDIM, DynaDIM
 Adjustable bracket tilt angle between ± 15°
 Surge protection (optional): 10kV
 Auto switch off for maintenance
 Operating temperature: -30°C - +55°C
 Complies with European Standards EN 60598, CE and ENEC certified

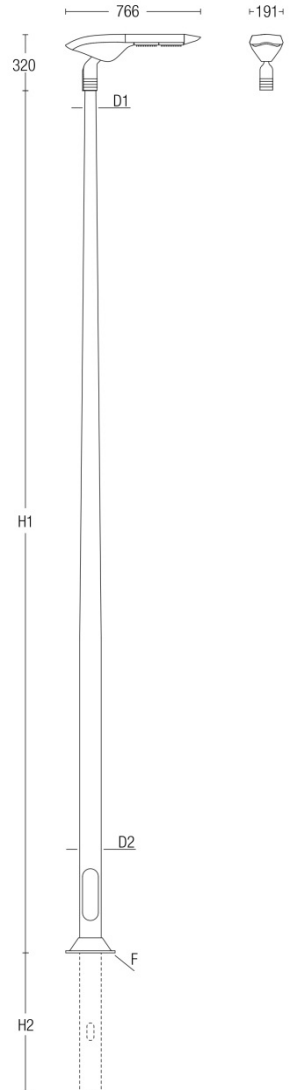

HPR PAZARLAMA A.Ş.

1. OSB Uygurlar Cd. No:1 Sincan
 06935, Ankara / Turkey
 T: +90 312 267 54 30 (pbx)
 F: +90 312 267 54 31
 info@heper.eu

We reserve the right to change specifications without prior written notice.

Edition: 21.09.2017

Current version under:

www.heper.eu/en/d-light