

D-Light 3 Milestone®

Ideal solution for roads and landscape areas

Modular structure with Heper's patented Milestone® LED modul

Power: 105W

Luminous flux: 10500lm - 12000lm

Color temperature: 3000K, 4000K

Removable & Replaceable LED Modules for easy maintenance

CIE Photometrical Classification: Full Cut-off

IES Photometrical Classification: Full Cut-off

147 lm/w @ 700mA, T_j=85°C – 4000K

LED Current 350mA | 525mA | 700mA

Optical unit lifetime:

L90 >118.000 hours as per TM-21 up to T_a=50°C

Optimized road light distribution

Multifaceted micro-reflection system with anti-glare feature

CRI 4000K > 70, 3000K > 80

Optimized PCB-Design; aluminum PCB or FR-4 PCB with touchdown technology

Corrosion resistant aluminum housing

Electrostatic powder coating

Color: standard HM1 to HM5, optional RAL codes

IP66, IK08

Safety class: standard CLASS I, optional CLASS II

Control system (optional): 1-10V, DALI, AstroDIM, DynaDIM


Adjustable bracket tilt angle between ± 15°

Surge protection (optional): 10kV

Auto switch off for maintenance

Operating temperature: -30°C - +55°C

Complies with European Standards EN 60598, CE and ENEC certified

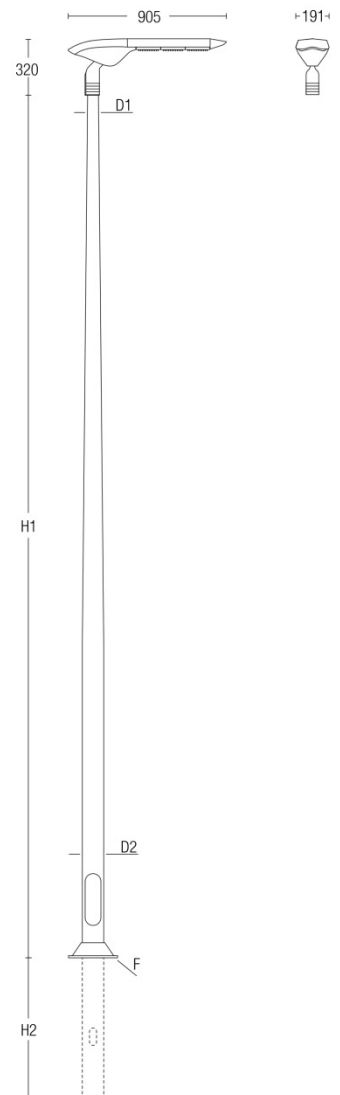

HPR PAZARLAMA A.Ş.

1. OSB Uygurlar Cd. No:1 Sincan

06935, Ankara / Turkey

T: +90 312 267 54 30 (pbx)

F: +90 312 267 54 31

info@heper.eu

We reserve the right to change specifications without prior written notice.

Edition: 21.09.2017

Current version under:

www.heper.eu/en/d-light