


D-Light 4 Milestone®

- Ideal solution for roads and landscape areas
- Modular structure with Heper's patented Milestone® LED modul
- Power: 140W
- Luminous flux: 14000lm - 16000lm
- Color temperature: 3000K, 4000K
- Removable & Replaceable LED Modules for easy maintenance
- CIE Photometrical Classification: Full Cut-off
- IES Photometrical Classification: Full Cut-off
- 147 lm/w @ 700mA, Tj=85°C – 4000K
- LED Current 350mA | 525mA | 700mA
- Optical unit lifetime:
- L90 >118.000 hours as per TM-21 up to Ta=50°C
- Optimized road light distribution
- Multifaceted micro-reflection system with anti-glare feature
- CRI 4000K > 70, 3000K > 80
- Optimized PCB-Design; aluminum PCB or FR-4 PCB with touchdown technology
- Corrosion resistant aluminum housing
- Electrostatic powder coating
- Color: standard HM1 to HM5, optional RAL codes
- IP66, IK08
- Safety class: standard CLASS I, optional CLASS II
- Control system (optional): 1-10V, DALI, AstroDIM, DynaDIM
- Adjustable bracket tilt angle between ± 15°
- Surge protection (optional): 10kV
- Auto switch off for maintenance
- Operating temperature: -30°C - +55°C
- Complies with European Standards EN 60598, CE and ENEC certified

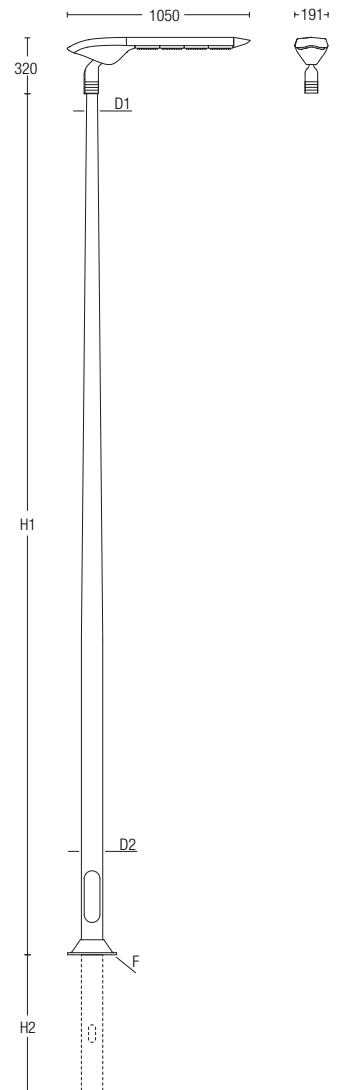

HPR PAZARLAMA A.Ş.

1. OSB Uygurlar Cd. No:1 Sincan
06935, Ankara / Turkey
T: +90 312 267 54 30 (pbx)
F: +90 312 267 54 31
info@heper.eu

We reserve the right to change specifications without prior written notice.

Edition: 21.09.2017

Current version under:

www.heper.eu/en/d-light